


**CONVERT HDMI TO VGA + ANALOG AUDIO SIMPLE, STABLE, PLUG & PLAY**



- 1080p60
- AG6201
- OFC
- OD 5.0 mm
- Plug & Play

## KEY FEATURES

- One-Way Conversion: HDNI (male.)
- Audio breakout; 3.5mm) - VGA (female) video.
- Audio breakout; 3.5mm jack extracts audio from HDMI.
- Full HD output: Up to 1920x1080 @ 60Hz
- AG6201 Chipset: Stable signal conversion and EDID handling.
- OFC cable, OD 5.0mm Low Loss & Flexible durability.
- Micro -USB power assist: 5 v input for weak HDMI sources.
- Driver- free: True plug & play across laptops,PC,TV boxs & consoles.

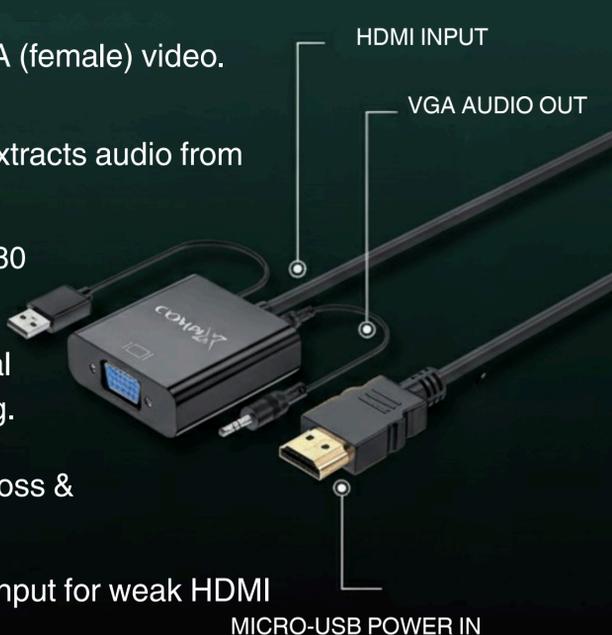

## Technical Specifications

**Input: HDMI Male (Video Audio)**  
**Output : HDMI Male , 3.5mm Analog Audio**  
**Audio : Breakout; 3.5mm extracts Audio EDID Video**  
**Power: Micro-USB 5v (optional; recommended for low-Power for weak HDMI sources)**  
**Chipset: AG6201**  
**Max Resolution; 1920x1080@ 60Hz**  
**Environment: Indoor use**



- 1080p60
- OFC
- 5V Assist

## Application & Compatibility



- Classroom
- Conference room
- Projectors



Laptops,PCS,TV boxes,consoles on legacy VGA displays.  
 Break out analog audio.

**What you'll need**

HDMI Cable  
Cabler

VGA

VGA  
USB Power

## F.A.Q

Frequently asked questions

### Does it work VGA→HDMI?

No. HDMI→VGA only.

### When to use Micro-USB power?

- If the image flickers/doesn't appear, add 5 V for stable power.

@ info@compixs.com www.compixs.com

RIYADH-SAUDI ARABIA DUBAI - UAE GUANGZHOU - CHINA